

01 P 05043

85

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>H04L 12/58</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/64110</b>
		(43) International Publication Date: <b>26 October 2000 (26.10.00)</b>
(21) International Application Number: <b>PCT/EP99/02763</b>		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: <b>19 April 1999 (19.04.99)</b>		
(71) Applicant (for all designated States except US): <b>NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).</b>		
(72) Inventors; and (75) Inventors/Applicants (for US only): <b>ROOKE, Michael [FI/FI]; Kyyhkysmäki 4 D 32, FIN-02600 Espoo (FI). SEVANTO, Jarkko [FI/FI]; Santavuorentie 7 A 11, FIN-00400 Helsinki (FI). MUHONEN, Ahti [FI/FI]; Itälähdenkatu 5 B 37, FIN-00210 Helsinki (FI).</b>		
(74) Agents: <b>LESON, Thomas, Johannes, Alois et al.; Tiedtke-Böhling-Kinne, Bavariaring 4, D-80336 München (DE).</b>		

Published  
With international search report.

(54) Title: METHOD FOR DELIVERING MESSAGES

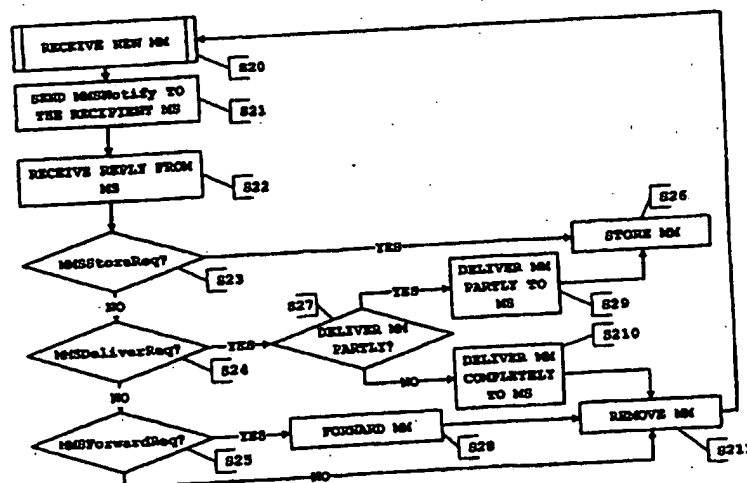

## (57) Abstract

The present invention proposes a method for delivering messages in a communication network consisting of at least one terminal and a messaging functionality, said method comprising the steps of receiving a message (MM) for said terminal (MS) by said messaging functionality (MMSC); sending a notification (MMSNotify) about the presence of said message (MM) from said messaging functionality (MMSC) to said terminal (MS); deciding by said terminal (MS) due to its capabilities (CAP) and current user profile (UP) how to handle said received message (MM); replying by said terminal (MS) to the notification sent by said messaging functionality (MMSC), therewith instructing according to the result of said decision step; and handling said message (MM) by said messaging functionality (MMSC) according to said instructions.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 00/64110

METHOD FOR DELIVERING MESSAGESField of the Invention

- 5 The present invention relates to a method for delivering messages in a communication network.

Related Background Art

- 10 The 3<sup>rd</sup> Generation Partnership Project (3GPP) currently discusses the issue of a multimedia messaging service center (MMSC) as a network element in a communication network, e.g. for the use in the general packet radio system (GPRS) and the universal mobile telecommunications  
15 system (UMTS). Unfortunately, most of it is still undefined, like the management of the capabilities and the user profile of the terminal.

The functionality of a multimedia messaging service  
20 center, from the technical viewpoint, provides a non-realtime service which operates partly in store-and-forward fashion. Additionally, multimedia messages are sent using the GPRS air interface, for example, and the contents of the messages can be text, images, speech,  
25 video clips or the like, or any arbitrary combination of these. For example, these contents can be delivered from one mobile station to another using this multimedia messaging service.

- 30 According to the service description of multimedia messaging, the content and length of the message is in principle unlimited. However, due to the various different types of terminals (e.g. mobile terminals), a large number of different capabilities of these terminals  
35 is present in the network. Consequently, each of these

terminals inevitably causes its own specific restrictions and limitations, in particular with respect to the possibility of handling a multimedia message.

- 5 For example, the available storage capacity is limited and may differ between different terminals, and thus, not all of the terminals can be able to receive all possible contents. Furthermore, the capabilities of a single terminal may change dynamically, e.g. if the terminal has
- 10 already received and stored a message, the remaining memory will be reduced. Similarly, the terminal can be connected or disconnected to or from other devices like laptops etc.
- 15 Moreover, in addition to the limitations caused by the terminal capabilities, the users may want to create or modify their own user profile, thereby also resulting in special restrictions. For example, a user may want to have certain types of multimedia messages to be stored in
- 20 the multimedia messaging service center, forwarded to an internet address or discarded. These user defined restrictions can be based for example on the size of the multimedia message, the content-type or the sender.
- 25 As can be seen from the foregoing, there arises the problem, that certain parts of the multimedia message or even the whole message may not be managed by the recipient terminal due to a lack of capabilities to receive, store, process or display the multimedia
- 30 message. Consequently, the uncontrolled transmission of multimedia messages can cause serious problems up to system failures in the terminals which may lead to at least a partly breakdown of the terminal functionality, thus being off communication.

WO 00/64110

3

Summary of the Invention

Therefore, it is an object of the present invention to provide a method for delivering messages in a communication network consisting of at least one terminal and a messaging functionality which is free from the above drawbacks.

According to the present invention, this object is achieved by a method for delivering messages in a communication network consisting of at least one terminal and a messaging functionality, said method comprising the steps of submitting information concerning the capabilities of the terminal and a current user profile thereof from said terminal to said messaging functionality upon the occurrence of a predetermined condition; deciding by said messaging functionality according to said information how to handle a message for said terminal received by said messaging functionality; and handling said message by said messaging functionality according to the result of said decision step.

Furthermore, the object is achieved by a method for delivering messages in a communication network consisting of at least one terminal and a messaging functionality, said method comprising the steps of receiving a message for said terminal by said messaging functionality; sending a notification about the presence of said message from said messaging functionality to said terminal; deciding by said terminal due to its capabilities and current user profile how to handle said received message; replying by said terminal to the notification sent by said messaging functionality, therewith instructing according to the result of said decision step; and

handling said message by said messaging functionality according to said instructions.

Furthermore, the present invention proposes a messaging  
5 functionality device comprising receiving means adapted to receive messages and information; processing means adapted to process received information data and messages; storing means; sending means adapted to send information and messages, respectively, to said terminal.

10

Still further, the present invention proposes a terminal device comprising receiving means adapted to receive messages and information; processing means adapted to process received information data and messages; storing  
15 means; sending means adapted to send information and messages, respectively, to said terminal.

Advantageous further developments of the present invention are as set out in the respective dependent  
20 claims.

Hence, it is an advantage of the present invention that the handling of the messages is based on the capabilities of the recipient terminal and the user profile of the  
25 corresponding subscriber. Accordingly, it is possible to correspondingly handle each message and each part of this message. In conclusion, failures or functionality breakdowns of the terminal are no longer possible and the method according to the invention further provides a  
30 large scope for the subscriber for a flexible and free participation in the network.

Preferred embodiments of the present invention are described herein below in detail by way of example with  
35 reference to the accompanying drawings.

### Brief Description of the Drawings

- Fig. 1 shows a schematic diagram of the basic signaling sequence for transmitting a multimedia message between a multimedia messaging service center and a recipient terminal according to a first embodiment of the present invention;
- Fig. 2 shows a flow-chart illustrating an example for the functionality implemented at the multimedia messaging service center after receiving a new mobile terminated multimedia message according to a second embodiment of the present invention; and
- Fig. 3 shows another flow-chart illustrating an example for the functionality implemented at the terminal after receiving an MMSNotify message according to the second embodiment of the present invention.

### Description of the Preferred Embodiments

According to the present invention, a submission of a multimedia-message as an example for a message to be delivered in a communication network is handled according to capabilities and a user profile of a recipient terminal like for example a mobile station. The decision how to handle the submission is based on the circumstance that content(s), size and type(s) of the multimedia message, the capabilities of the terminal, and the user profile of a subscriber related to said terminal are available to respective decision means.

A handling of those messages to be delivered will be done in another element of the communication network, i.e. a

network device having a messaging functionality implemented. During the following description of the preferred embodiments of the invention, the description will be made by referring to the example of a multimedia messaging service center as such a network device having implemented the messaging functionality and by referring to the example of a multimedia message as a delivered message. Nevertheless, it is to be noted that these examples are by no way limiting. Namely, also a monomedia message could be delivered and the message functionality need not be implemented in a single network device such as a multimedia messaging service center, but can also be a distributed functionality.

With respect to the above mentioned decision, for the sake of explanation, the multimedia message can be regarded as multimedia messaging service center originated while the terminal capabilities and the user profile can be regarded as being inherent to a respective terminal. Hence, information has to be transmitted in either way to enable a decision.

Further, for the sake of convenience, it would be appropriate if the decision is automated and optimized depending on the parameters provided by the terminal and the user. However, this is not a prerequisite for the present invention.

Since the multimedia message can have a certain format, multiple parts (segments), different contents (text, images, speech, videos, etc.), a different size, or a sender identity, it is apparent that it is dependent on the capabilities of the recipient terminal and the currently defined user profile, whether the terminal is able to receive, display or process the multimedia



WO 00/64110

7

message, and further, dependent on whether the subscriber wishes to do so.

Consequently, the result of the decision as to how to  
5 handle the multimedia message can be that it shall be  
delivered completely, in part or modified, that it shall  
be discarded, stored in the multimedia messaging service  
center or forwarded, for example, to an internet email-  
address. As mentioned before, instead of an automated  
10 decision, a request to the user what to do is of course  
also possible, either in general or in special cases.  
Besides, the storage of the multimedia message in the  
multimedia messaging service center will in the most  
cases be limited to a certain time period, since there is  
15 presumably no unlimited memory available in the  
multimedia messaging service center (consequently, the  
MMSC may inform the subscriber by a respective  
notification about the expiry of the time period before  
erasing the stored message). If the multimedia message  
20 shall only be delivered in part, it is possible that also  
the not delivered parts are stored, forwarded or  
discarded. The case of a modification of the multimedia  
message might usually be the conversion of the multimedia  
message from one format to another, but also a  
25 compression or any other kind of processing the data  
shall be understood by this expression. As a result, a  
multimedia message which is not as such divided into  
parts can be segmented by this processing. With regard to  
the several possibilities of how to handle the submission  
30 of the multimedia message, the result of the decision  
might finally also be a respective combination of the  
items discussed above.

Apart from that, if the multimedia messaging service  
35 center is designated as a new network element for the

general packet radio and universal mobile telecommunications systems, the data transmission will most likely be performed with protocol data units in non-realtime by use of the respective other network elements according to said systems, which other network elements are omitted from the description of the present invention for the sake of distinctness.

#### First Embodiment

10 According to a first embodiment of the present invention, the decision concerning the selection of the delivery of a multimedia message is made in the multimedia messaging service center (MMSC). The basic idea for this approach  
15 resides in the fact that, after a new multimedia message has been received, the multimedia messaging service center is immediately able to decide which type of delivery has to be selected. Stated in other words, the multimedia messaging service center acts as a pre-filter  
20 for the terminal.

To provide such a functionality, the terminal capabilities and the current user profile have to be stored in the multimedia messaging service center.  
25 Furthermore, this information has to be updated under certain conditions. If these information (terminal capabilities and user profile) and the imparted multimedia messaging service center are never changed at all, the information has to be submitted and stored once  
30 and never to be updated. Of course, these prerequisites are nearly never met. Hence, the initial information and the updates thereof have to be submitted to the multimedia messaging service centers in order to keep the information stored therein valid.

This information can include a display type of said terminal, a keyboard type of said terminal, codecs supported by said terminal, a memory size of said terminal, an electrical connection of said terminal to other devices, an external accessory attachment to said terminal or the like, and of course a current user profile.

There are several possible conditions when to submit the information from the terminal to the multimedia messaging service center and the possibility of updating is not limited to only one condition. However, the update should be coupled to the necessity to update, or at least to the possibility of submitting the information with other data (this can be any signaling sequence between these two network elements) that has to be submitted, in order to avoid a cluttering of traffic. Consequently, the condition when the terminal starts its signaling sequence to submit the information is predetermined. This condition can be a login of said terminal into said network, a change of connection conditions of said terminal, a context activation or the change of a context condition, a user profile creation or modification, a terminal originated traffic or a terminal terminated traffic, a request of said multimedia messaging service center, a notification of said multimedia messaging service center concerning the presence and/or the contents of a new multimedia message to said terminal, or the like.

With reference to Fig. 1, the signaling sequence for submitting the information about the capabilities of the terminal and the current user profile is illustrated by the example of submitting the information upon the predetermined condition of context activation.

Consequently, in a first step S11, a terminal MS such as a mobile station requests a context activation to the multimedia messaging service center MMSC via a support  
5 node SN. With this request for context activation, the terminal MS submits simultaneously its capabilities CAP and current user profile UP. According to examples of the current network being the GPRS or UMTS, the whole signaling shown in Fig. 1 can take place by using  
10 protocol data units PDU.

After this transmission has been completed, the multimedia messaging service center MMSC stores the user profile UP of the terminal MS. Due to the capabilities of  
15 the multimedia messaging service center, it may be possible or necessary to adapt the user profile UP of the terminal MS within the range of the capabilities CAP of the terminal MS. However, the user may inhibit such amendments of his preferred user profile. The storage of  
20 the user profile UP and its eventual processing is done in a step S12.

In a third step S13 at least the acknowledgement of the context activation is submitted from the multimedia  
25 messaging service center MMSC to the terminal MS via the support node SN.

However, if a multimedia message MM for the terminal MS is currently present in the multimedia messaging service  
30 center MMSC, there will be a step S14 before step S13, wherein this multimedia message MM is handled according to the user profile UP stored in the multimedia messaging service center MMSC. The handling of the multimedia message MM corresponds to the result of a decision  
35 process which is based on the capabilities CAP and the

WO 00/64110

11

user profile UP of the terminal MS which are now stored in the multimedia messaging service center MMSC. The possible results of this decision process are discussed above in detail and it is mentioned again that according to the first embodiment, this decision is made by the multimedia messaging service center MMSC.

According to the result of this decision, the handling of the multimedia message MM may require a processing of the data of the multimedia message MM (e.g. in the cases of a modified or a partly deliverance) or not, as is mentioned above. In any case, if at least parts of the multimedia message MM have to be submitted to the terminal MS, this is done in the step S13 together with the submission of the context activation acknowledgement.

As mentioned before, the example depicted in Fig. 1 is given by way of illustration only, while the first embodiment is not limited thereto. Consequently, a respective adaptation of the process shown in Fig. 1 to the other possibilities according to the first embodiment as described above is fully apparent to those skilled in the art.

## 25 Second Embodiment

Apart from the solution according to the first embodiment, there is the alternative to maintain the terminal capabilities and user profile information only at the terminal side and consequently, to take the decision concerning the selection of the delivery of a multimedia message by the terminal.

Therefore, the basic idea of the second embodiment resides in that the terminal capabilities and user

profile information is stored in the terminal, e.g. in the terminal equipment or, in the case of a mobile terminal, in the SIM or in both. Due to this, the decision regarding the delivery of a multimedia message  
5 is taken in the terminal.

The functionality of the multimedia messaging service center and of the terminal according to the second embodiment are now described with reference to Fig. 2 and  
10 Fig. 3.

Fig. 2 illustrates an example of the functionality of the multimedia messaging service center MMSC according to this embodiment upon receipt of a new mobile terminated  
15 multimedia message MM. As can be gathered therefrom, the multimedia messaging service center MMSC automatically sends a special control message MMSNotify in a step S21 to the terminal MS after it has received a new multimedia message MM (step S20). The MMSNotify message contains  
20 information about the actual multimedia message MM such as the total size of the message, the content(s), the content type(s), a human readable description and so on.

On the basis of the stored information about the terminal capabilities CAP and its current user profile UP, the  
25 terminal MS now processes the information included in the MMSNotify message and accordingly decides how to handle the multimedia message MM. Based on this decision process, the terminal MS sends a corresponding reply  
30 message to the multimedia messaging center MMSC, which is received by the multimedia messaging service center MMSC in a step S22. This process is illustrated by way of example in Fig. 3, which will be described herein below.

It is noted that the present invention does not restrict the means by which the MMSNotify message is delivered to the terminal MS. For example, the multimedia messaging service center MMSC could send the MMSNotify message as a special SMS message, which is then parsed by the terminal MS, or the multimedia messaging service center MMSC could use a specific bearer (e.g. a control channel) dedicated to multimedia messaging service.

- 10 Anyway, the signaling sequence according to the second embodiment for the exchange of messages and information, respectively, is based upon the following principle. Upon receipt of the MMSNotify message, the terminal MS submits the MMSResultRequest message as a reply, which is
- 15 received by the multimedia messaging service center MMSC in the step S22. The possible MMSResultRequest messages do, however, differ from each other due to the result of the decision process. Hence, the MMSResultRequest can be a MMSDeliverReq, a MMSStoreReq, a MMSForwardReq or a
- 20 MMSDiscardReq, for example.

Hence, in a step S23, the multimedia messaging service center MMSC checks if the reply of the terminal MS is the MMSStoreReq message, and in case of "yes", the multimedia

25 message MM is stored in the multimedia messaging service center in a step S26. In case of "no" the process proceeds further to the step S24 to check whether the reply is the MMSDeliverReq message.

- 30 If the MMSDeliverReq message was replied by the terminal MS, the process flows to a step S27, wherein the multimedia messaging service center MMSC checks the MMSDeliverReq message, whether the multimedia message shall be delivered partly or completely. The step S29
- 35 shown in Fig. 2 represents the case of a partly

deliverance of the multimedia message MM to the terminal MS, followed by the above mentioned step S26, wherein at least the undelivered parts of the multimedia message MM are stored in the multimedia messaging service center MMSC. In contrast thereto does the step S210 represent the case of a completely deliverance of the multimedia message MM to the multimedia messaging service center MMSC, followed by a step S211, wherein the multimedia message MM is removed from the multimedia messaging service center MMSC after the deliverance.

If the MMSDeliverReq message was not replied by the terminal MS, there is checked in a step S25 of the process, whether the MMSForwardReq message was replied, and if not, it is assumed that the MMSDiscardReq message is present and the multimedia message MM is removed from the multimedia messaging service center MMSC according to the step S211. In case the MMSForwardReq message is present, the multimedia message MM is first forwarded in a step S28 to a destination given by the MMSForwardReq message, before it is removed from the multimedia messaging service center MMSC in the step S211.

Now the functionality of the terminal MS after receiving an MMSNotify message in a step S30 according to the step S21 of Fig. 2 is described with reference to Fig. 3.

Specifically, the terminal MS checks its capabilities CAP and user profile UP in a step S31, followed by the corresponding decision steps S32-S35. As can be seen from Fig. 3, the choice to leave the decision to the user is included as an option corresponding to the step S32. In case the user profile UP is set such that the user shall decide on the delivery of a multimedia message MM, the result of his input is carried further to the steps



WO 00/64110

15

S33-S35. If the decision is to be done automatically, according to the second embodiment of the present invention, the terminal MS decides due to its user profile UP and capabilities CAP how to handle the multimedia message MM present in the multimedia messaging service center MMSC. Anyway, also in this case the result is carried further to the steps S33-S35.

The several choices for the terminal MS how to decide on the delivery of the multimedia message MM are discussed above, and some of these are shown in Fig. 3 as explanatory examples. That is, in step S33 the terminal checks whether the result is to retrieve the multimedia message MM partly or completely, and if this is the case, a step S37 follows, wherein the MMSDeliverReq message is sent to the multimedia messaging service center MMSC. If the multimedia message MM shall not be retrieved, but the result is checked in a step S34 that it is to be forwarded, there follows a step S38 to send the MMSForwardReq message to the multimedia messaging service center MMSC. In case the result is not to forward the message, the process flows to step S35 to check whether the result is to have the multimedia message MM to be stored in the multimedia messaging service center MMSC. If this is true, the step S39 follows which includes the sending of the MMSStoreReq message to the multimedia messaging service center MMSC, if it is not true, the step S40 follows which includes the sending of the MMSDiscardReq message to the multimedia messaging service center MMSC, assuming that this is the result of the decision process.

All of the steps S37-S40 are followed in any case by a step S41, in which the user profile is one more time checked, whether the user is to be notified by a proper

notification in a step S42 about the presence of a multimedia message MM and, moreover, probably about the performed handling of it, or not. In both cases, the flow is ended until another MMSNotify message will be  
5 received.

It is mentioned, that the reply message sent by the terminal MS according to one of the steps S37-S40 of Fig. 3 is received by the multimedia messaging service  
10 center MMSC in the step S22 of Fig. 2. Further, this reply message contains in any way every information needed for the multimedia messaging service center MMSC to act according to the terminal originated decision on the delivery of the multimedia message MM.

15 It is noted again, that the examples depicted by Figs. 2 and 3 are not limiting the invention, and the range of choices for the delivery of the multimedia message has been set out above in greater detail. According to the  
20 present invention, a further refinement and/or modification of the flow-charts of Figs. 2 and 3 can easily be obtained along the lines of the description as set out above.

25 As a further alternative within the second embodiment, the signaling between the terminal and the multimedia messaging service center could be implemented with a single request-reply message pair. Stated in other words, the terminal could always reply to the MMSNotify message  
30 with a MMSNotifyReply message. In this case, the desired functionality of the terminal and the multimedia messaging service center can be achieved by allocating a control flag (e.g. in 2-bit representation) to each part of the multimedia message in said MMSNotifyReply message.  
35 If the value of the flag is either deliver, store,

forward or discard, the terminal is able to inform the multimedia message service center with a single reply message how to handle each part of the multimedia message.

5

This kind of solution would allow a more flexible functionality. For example, it is fully apparent that, according to this alternative, it would be possible to instruct the multimedia messaging service center with one  
10 reply message to treat each part of the multimedia message independent and separated from the other parts, so that some parts can be delivered to the terminal, some parts can be forwarded to an internet email address etc.

15 However, this provides that the multimedia message is clearly defined in parts and that the multimedia messaging service center is able to handle each part separated.

20 According to the second embodiment, there arise the following further advantages:

The terminal capabilities and user profile information do not have to be maintained in the multimedia messaging  
25 service center, whereby both the storage and processing capacities of the multimedia messaging service center are not consumed, rather being left for other objects.

Furthermore, the information does not have to be  
30 delivered each time upon predetermined conditions to keep the information stored in the multimedia messaging service center valid. Therefore, no extra signaling is caused between the terminal and the multimedia messaging service center. In conclusion, it is guaranteed that the

information is always up to date and no traffic cluttering appears due to update signaling.

Still further, no extra amount of processing has to be  
5 done in the multimedia messaging service center. Since it  
can be expected that the structure of the multimedia  
messaging service center can be left on a less complex  
level according to the second embodiment, i.e. the  
10 implementation of the multimedia messaging service center  
becomes simpler and its performance requirements  
decrease, there might be reasons why this embodiment  
could be preferable.

As is described above, the present invention proposes a  
15 method for delivering messages in a communication network  
consisting of at least one terminal and a messaging  
functionality, said method comprising the steps of  
receiving a message MM for said terminal MS by said  
messaging functionality MMSC; sending a notification  
20 MMSNotify about the presence of said message MM from said  
messaging functionality MMSC to said terminal MS;  
deciding by said terminal MS due to its capabilities CAP  
and current user profile UP how to handle said received  
message MM; replying by said terminal MS to the  
25 notification sent by said messaging functionality MMSC,  
therewith instructing according to the result of said  
decision step; and handling said message MM by said  
messaging functionality MMSC according to said  
instructions.

30

It should be understood that the above description and  
accompanying figures are only intended to illustrate the  
present invention by way of example only. The preferred  
embodiments of the present invention may thus vary within  
35 the scope of the attached claims.

WO 00/64110

19

Claims

1. A method for delivering messages in a communication network consisting of at least one terminal and a messaging functionality, said method comprising the steps of
- submitting information concerning the capabilities (CAP) of the terminal (MS) and a current user profile (UP) thereof from said terminal (MS) to said messaging functionality (MMSC) upon the occurrence of a predetermined condition;
- deciding by said messaging functionality (MMSC) according to said information how to handle a message (MM) for said terminal (MS) received by said messaging functionality (MMSC); and
- handling said message (MM) by said messaging functionality (MMSC) according to the result of said decision step.
2. A method according to claim 1, further comprising the step of storing said information in said messaging functionality (MMSC).
3. A method according to claim 1, wherein the result of said decision step can at least reside in that said message (MM) for said terminal (MS) is delivered completely, partly or modified to said terminal (MS), that said message (MM) is discarded, that said message (MM) is forwarded to another terminal, or that said message (MM) is stored in said messaging functionality (MMSC).
4. A method according to claim 1, wherein said predetermined condition is at least one of the following events: a login of said terminal (MS) into said network,

a change of connection conditions of said terminal (MS),  
a context activation or the change of a context  
condition, a user profile (UP) creation or a user profile  
(UP) modification, a terminal originated traffic or a  
5 terminal terminated traffic, a request of said messaging  
functionality (MMSC), a notification of said messaging  
functionality (MMSC) concerning the presence of a new  
message (MM) to said terminal (MS), and a notification of  
said messaging functionality (MMSC) concerning the  
10 content, type and size of a new message (MM) to said  
terminal (MS).

5. A method according to claim 1, wherein said  
information concerning said capabilities (CAP) of said  
15 terminal (MS) comprises at least one of the following: a  
display type of said terminal (MS), a keyboard type of  
said terminal (MS), codecs supported by said terminal  
(MS), a memory size of said terminal (MS), an electrical  
connection of said terminal (MS) to other devices, an  
20 external accessory attachment to said terminal (MS), or  
the current user profile (UP).

6. A method for delivering messages in a communication  
network consisting of at least one terminal and a  
25 messaging functionality, said method comprising the steps  
of

receiving a message (MM) for said terminal (MS) by  
said messaging functionality (MMSC);

30 sending a notification (MMSNotify) about the  
presence of said message (MM) from said messaging  
functionality (MMSC) to said terminal (MS);

deciding by said terminal (MS) due to its  
capabilities (CAP) and current user profile (UP) how to  
handle said received message (MM);

replying by said terminal (MS) to the notification sent by said messaging functionality (MMSC), therewith instructing according to the result of said decision step; and

5        handling said message (MM) by said messaging functionality (MMSC) according to said instructions.

7. A method according to claim 6, wherein the result of said decision step can at least reside in that said  
10    message (MM) for said terminal (MS) is delivered completely, partly or modified to said terminal (MS), that said message (MM) is discarded, that said message (MM) is forwarded to another terminal, or that said  
15    message (MM) is stored in said messaging functionality (MMSC).

8. A method according to claim 6, wherein said notification (MMSNotify) about the presence of said  
20    message (MM) from said messaging functionality (MMSC) to said terminal (MS) further notifies about at least contents, types and size of said message (MM).

9. A method according to claim 8, wherein said terminal (MS) replies to said messaging functionality (MMSC) in  
25    the course of the signaling by sending a notification reply message which contains a control flag for each part of said message (MM), and the value of said control flag could be either deliver, modify, store, forward or discard.

30    10. A method according to claim 6, wherein said decision step comprises a request of said terminal (MS) to the user how to handle the message (MM) and an input by the user representing the result of said decision step.

11. A messaging functionality device comprising  
receiving means adapted to receive messages (MM) and  
information;  
processing means adapted to process received  
5 information data and messages (MM);  
storing means;  
sending means adapted to send information and  
messages (MM), respectively, to said terminal (MS).
- 10 12. A terminal device comprising  
receiving means adapted to receive messages (MM) and  
information;  
processing means adapted to process received  
information data and messages (MM);  
15 storing means;  
sending means adapted to send information and  
messages (MM), respectively, to said terminal (MS).



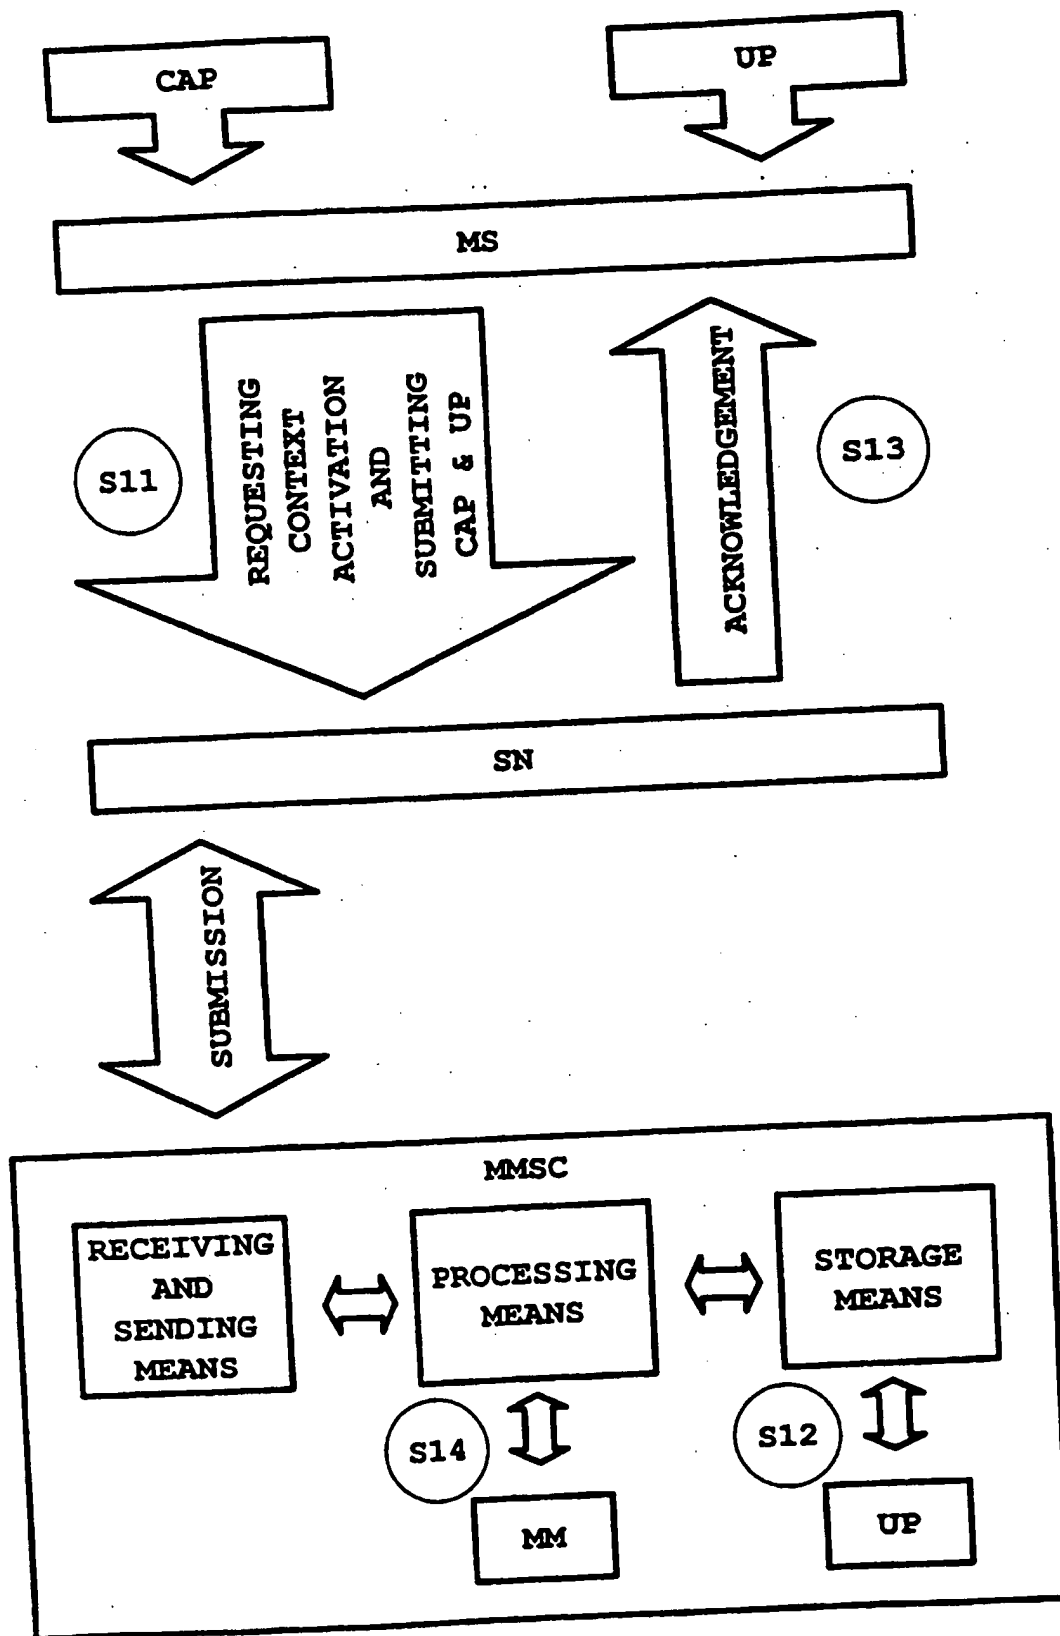


FIG. 1

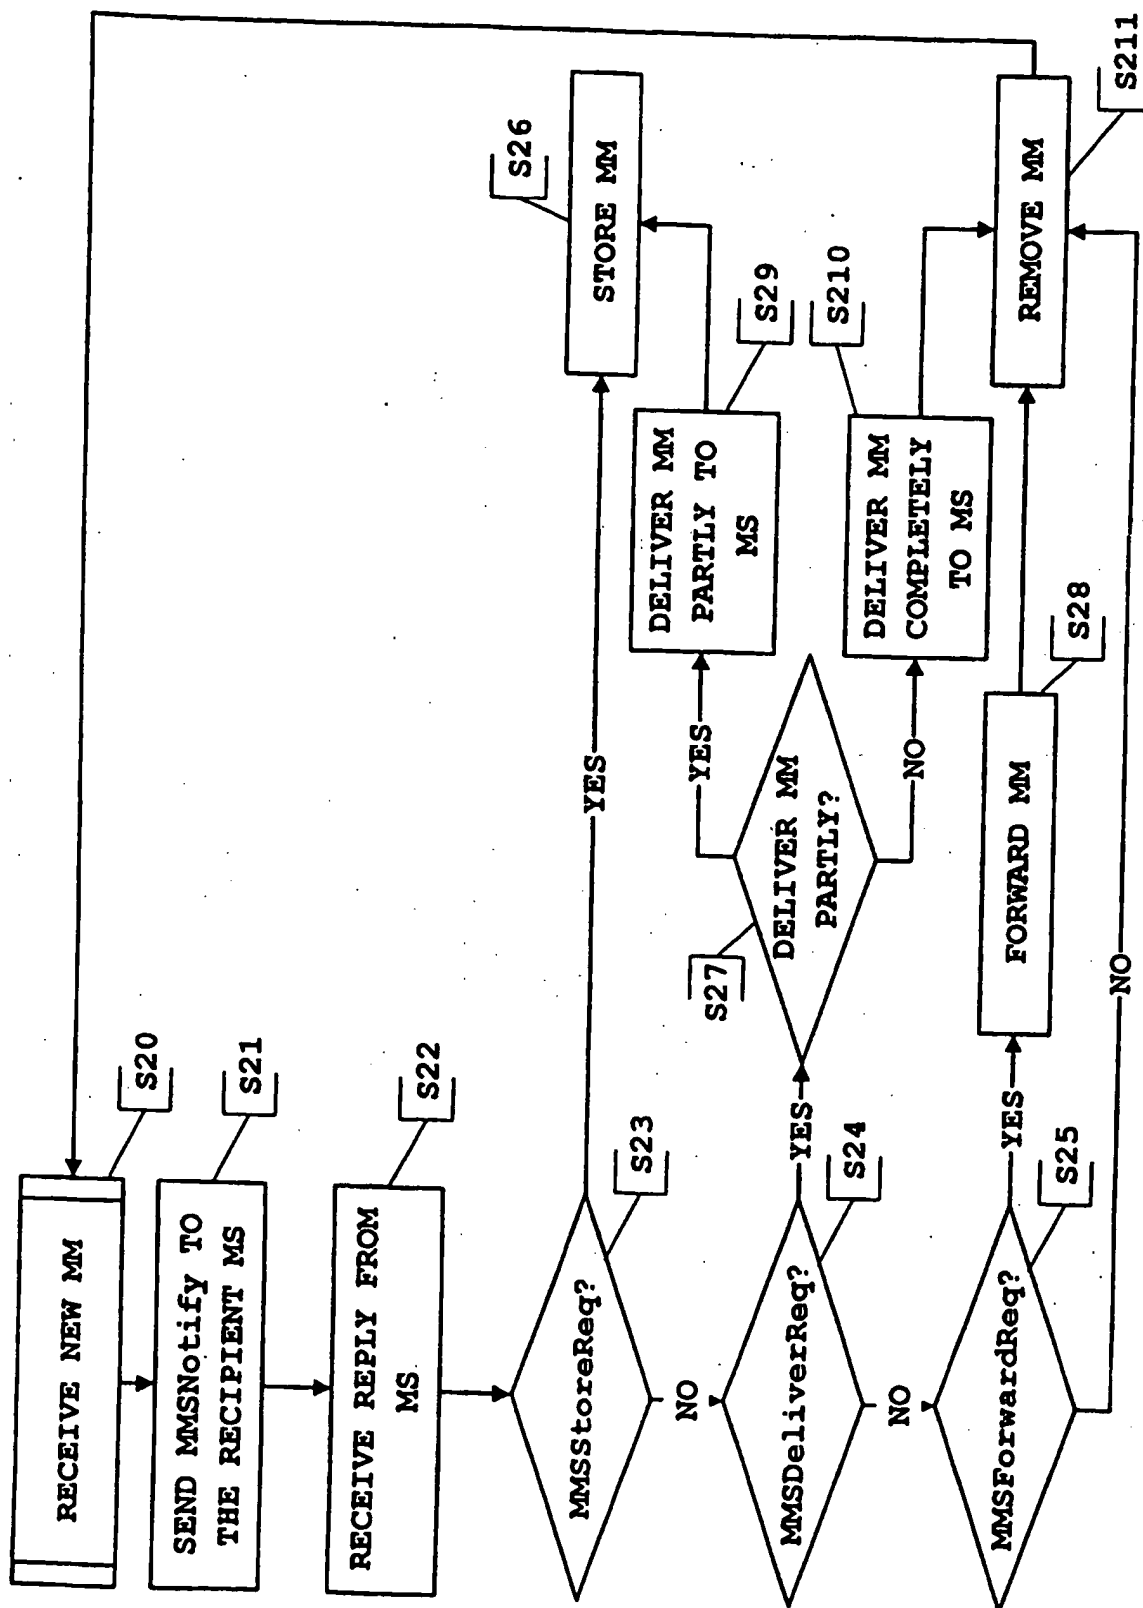


FIG. 2

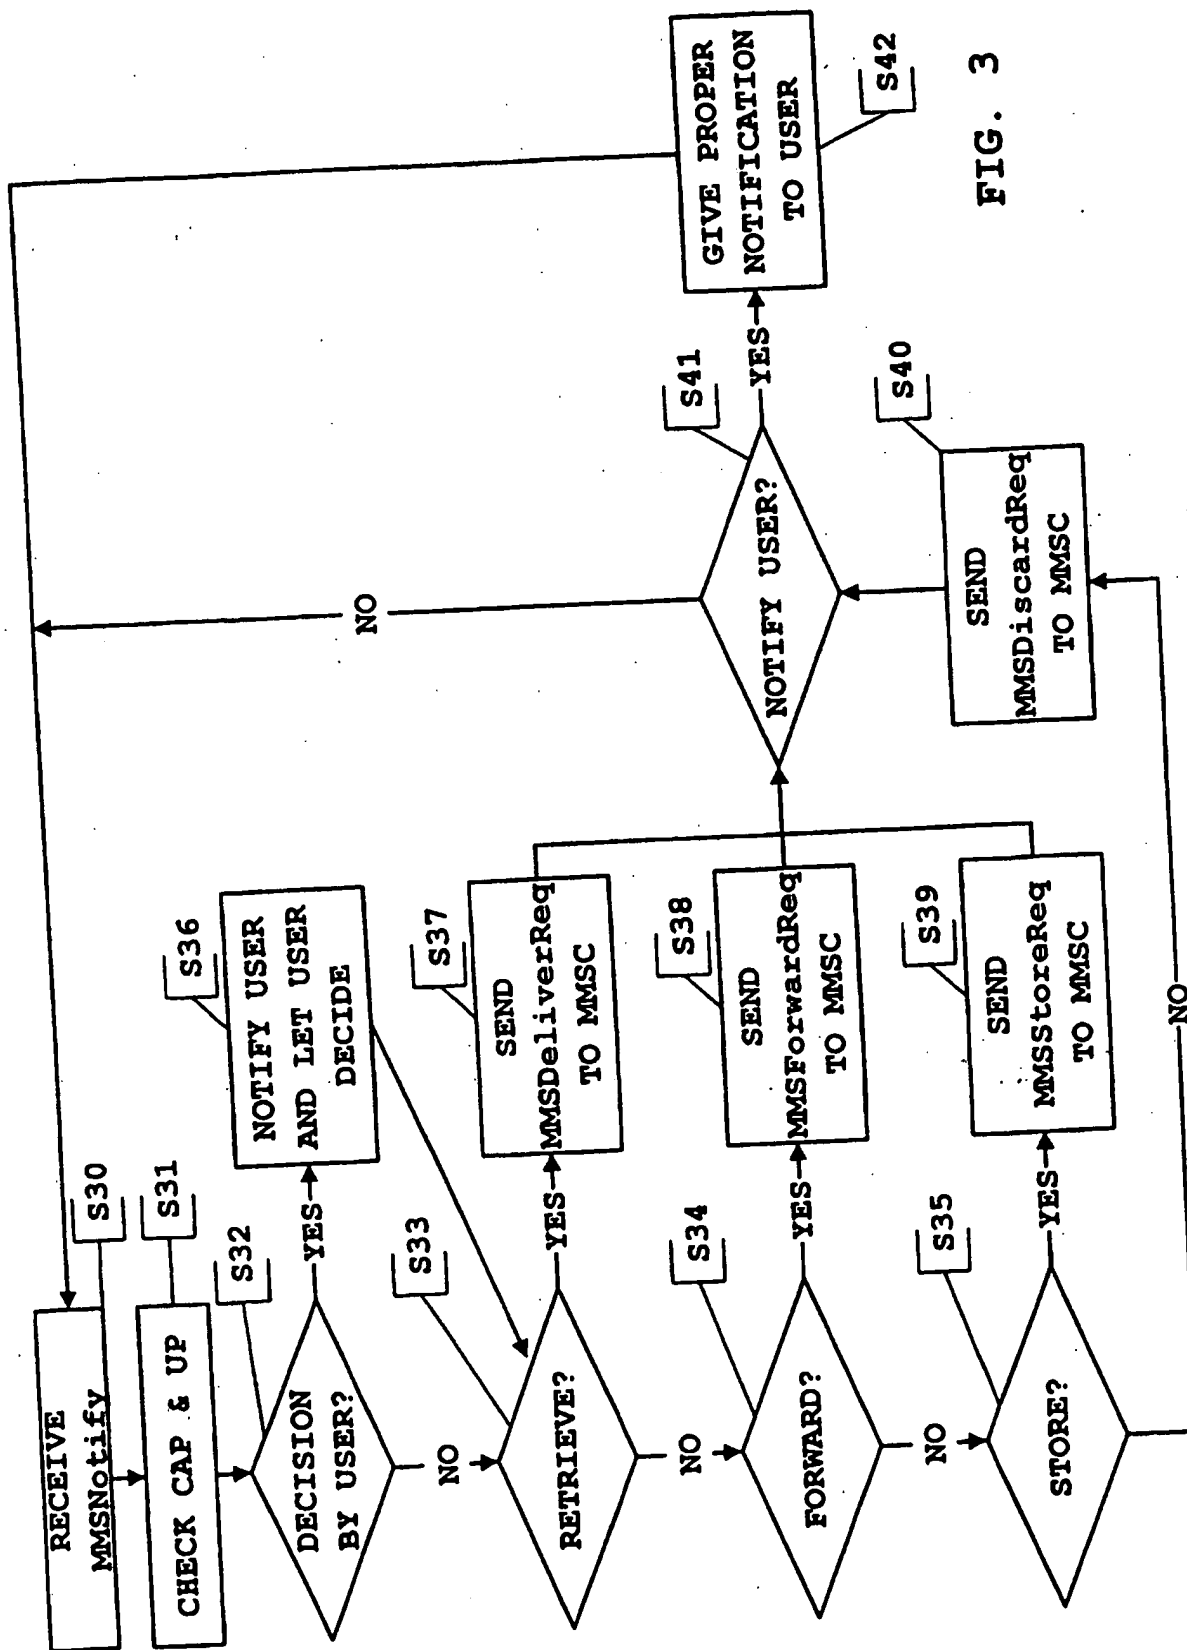


FIG. 3

# INTERNATIONAL SEARCH REPORT

International Application No.  
**PCT/EP 99/02763**

**A. CLASSIFICATION OF SUBJECT MATTER**  
**IPC 7 H04L12/58**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

**IPC 7 H04L**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 00787 A (DATALINK SYSTEMS CORPORATION) 8 January 1998 (1998-01-08) abstract page 2, line 10 -page 3, line 14 page 5, line 15 - line 27	1-12
A	EP 0 785 661 A (AT & T CORP) 23 July 1997 (1997-07-23) abstract column 2, line 47 -column 3, line 13	1,6,11, 12

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "A" document member of the same patent family

Date of the actual completion of the international search

**1 October 1999**

Date of mailing of the international search report

**11/10/1999**

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo rd,  
Fax: (+31-70) 340-3016

Authorized officer

**Poggio, F**

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/02763

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9800787 A	08-01-1998	NONE	
EP 0785661 A	23-07-1997	US 5781614 A	14-07-1998
		AU 1019197 A	24-07-1997
		CA 2189089 A	20-07-1997
		JP 9233197 A	05-09-1997

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**